

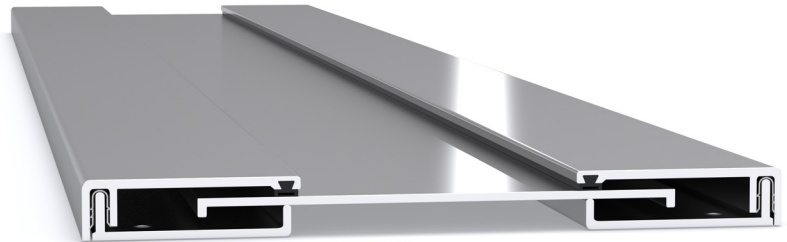


25K to 150K Aluminium Wall & Ceiling Expansion Joint Covers

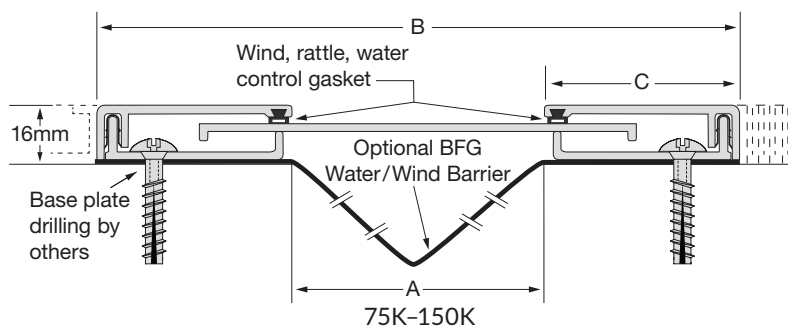

K Series wall and ceiling expansion joint covers are designed to finish virtually flush with cement sheet wall and ceiling board. They can also be surface mounted to walls and ceilings. As standard all visual surfaces come with a clear anodised finish (standard) or brass colour anodised finish (specify brass colour finish). On request they can be powder coated or anodised to other colours and textures, including woodgrain.

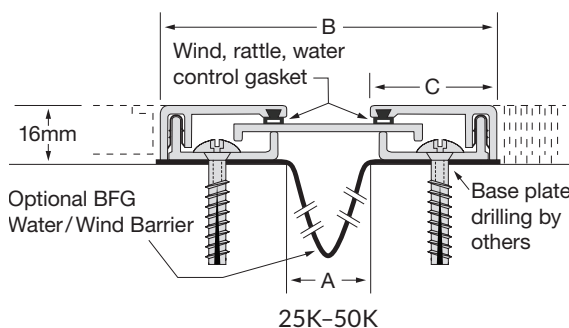

Materials

- Aluminium 6063-T5 alloy.
- Supplied in 3050mm lengths.
- All visual surfaces come with a 20-micron clear anodised finish.
- All visual surfaces come with a 20-micron clear anodised finish.

Fixings

- Side base sections should be site drilled for fixings at ~450mm centres.
- Suitable fixings should be sourced to suit the substrate.

TECHNICAL CHARACTERISTICS

Illustrated: 25K & 75K

Aluminium Code	A	B	C	Movement	Total Available Movement	Overall Depth
25K	25	101	38	+/-23mm	46mm	16mm
50K	50	126	38	+/-23mm	46mm	16mm
75K	75	191	58	+/-45mm	90mm	16mm
100K	100	216	58	+/-45mm	90mm	16mm
150K	150	266	58	+/-45mm	90mm	16mm

Wider joint widths available on request.

All dimensions in millimetres. All mechanical expansion joint fixings by others

Features



Indoor Use



Multidirectional
6-way Movement



Outdoor Use



Water Gutter
Available



Fire Rateable

Further technical specifications and information – visit www.latham-australia.com

- PDF & DWG Details
- Architectural Specs
- Warranty Details
- Product Information
- Fire Rated Systems
- Working Video
- Joint Cover Specs
- Product Catalogue