
Latham Asbraloy™ Aluminium S Recess Mounted Safety Stair Tread Nosing Data Sheet **TYPE-735S**





Sparkling Black (Standard) LRV: 28.9

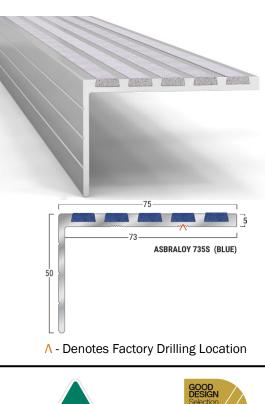

LRV: 41.58

Terracotta

Teal

LRV: 31.19

Buff

LRV: 40.81

Blue

LRV: 32.01

LRV: 34.18

Teak LRV: 35.75

Brown LRV: 32.75




www.latham-australia.com

Blue Grey LRV: 37.11

Plum

LRV: 40.62

Silver Grev LRV: 37.70



Rose LRV: 47.10

Cactus Green

LRV: 36.16

Lumo Luminescent Glow-In-The-Dark LRV: 51.62

PRODUCT DETAILS - 735S

Recess mounted stair tread nosings are designed for both internal and external applications. The nosing can be recessed into new work or recessed into existing floor finishes. The stair tread nosings can be installed on most flooring finishes including stone, concrete, tile, terrazzo, timber, pavers, brick, carpet and vinvl.

FEATURES

- P5 Slip Classification.
- Super hard wearing.
- Abrasive Silicon Carbide Mineral Insert.
- 16 insert colours available.
- Luminance Reflective Value (LRV).
- UV Stable.

MATERIALS

Standard Supply: Cut to site required lengths, complete with countersunk holes, stainless steel screws and plastic plugs, or in full 4600mm lengths. Aluminium: 6063-T5, ASTM B221, Mill Finish. Inserts: Suregrip[™] Sparkling Black (standard) Silicon Carbide Mineral Inserts, or Supagrit[™] Coloured Silicon Carbide Mineral Inserts.

COMPLIANCE

- AS 1428.2-1992 compliant.
- Wet Slip Test: Mean British Pendulum (SRV) Classification - P5
- Oil Wet Ramp Test: Slip Resistant Acceptance Group - R12
- Tested to Australian Standard ISO 9239 Reaction to Fire Test for Flooring.

FURTHER TECHNICAL SPECIFICATIONS

- Website Link PDF and DWG Details
- **Stair Tread Installation Instructions**
- Luminance Contrast Information •
- **Slip Resistant Testing Information**
- Code Compliance Information
- **Colour Range Information**
- **Fire Test Information**
- Adhesive Technical Data Sheet
- Full Product Catalogue
- Maintenance Guide
- Photo Gallery
- Accessories Guide
- **Warranty**



e sales@latham-australia.com p +612 9879 7888