



Latham Carpet-Line Series Aluminium Expansion Joint Cover  
**DRCA**

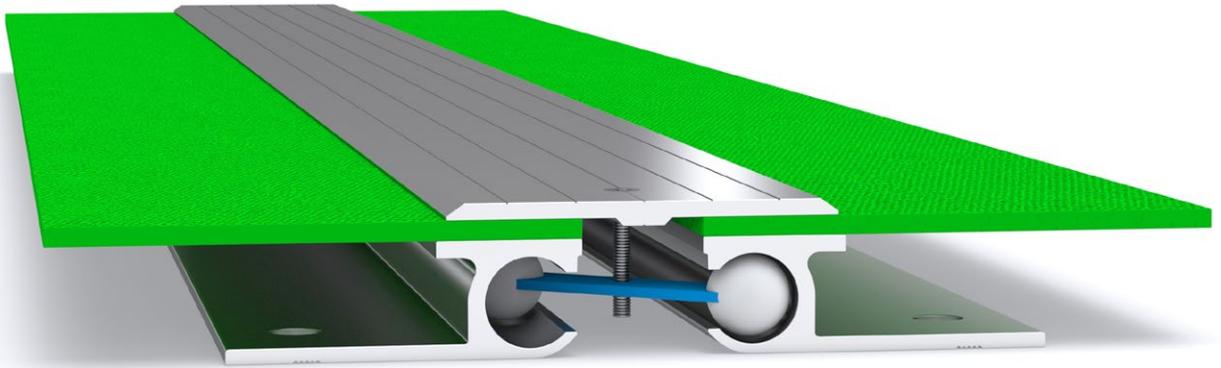

Illustrated: DRCA-25

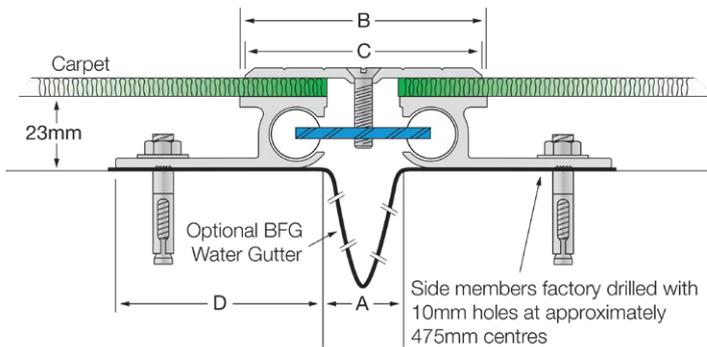

Aluminium Code ribbed deck	A	B	C	D	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
DRCA-25	25	79	75	93	+25/-15mm	40mm	23mm	3mm
DRCA-50	50	104	100	93	+/-25mm	50mm	23mm	3mm
DRCA-75	75	129	125	93	+/-25mm	50mm	23mm	4mm
DRCA-100	100	154	150	93	+/-25mm	50mm	23mm	5mm
DRCA-125	125	179	175	93	+/-25mm	50mm	23mm	5mm

**FEATURES**

- Aluminium floor expansion joint cover.
- Suited to carpet flooring applications.
- These joint covers should be used in conjunction with carpet and underlay, direct stick carpet or carpet tiles.
- 23mm depth below carpet base.
- Installed in a preformed recess.

**MATERIALS**

- Aluminium 6063-T5 mill finish alloy.
- Supplied in 3050mm lengths.
- Spring steel treated centering bar with nylon spherical balls (at ~475mm centres).

**FIXINGS**

- Side member pre-drilled at ~475mm centres for 10mm fasteners.

**FURTHER TECHNICAL SPECIFICATIONS**

- [Website Link - PDF and DWG Details](#)
- [Product Information](#)
- [Joint Specifications](#)
- [Fire Rated Systems](#)
- [Full Product Catalogue](#)
- [Architectural Specifications](#)
- [Warranty](#)



multi directional  
6-way movement



indoor & out-  
door use



BFG water  
gutter



fire rated (joint  
widths >50mm)