



Latham Carpet-Line Series Aluminium Expansion Joint Cover with Brass Cover Plate DRCB

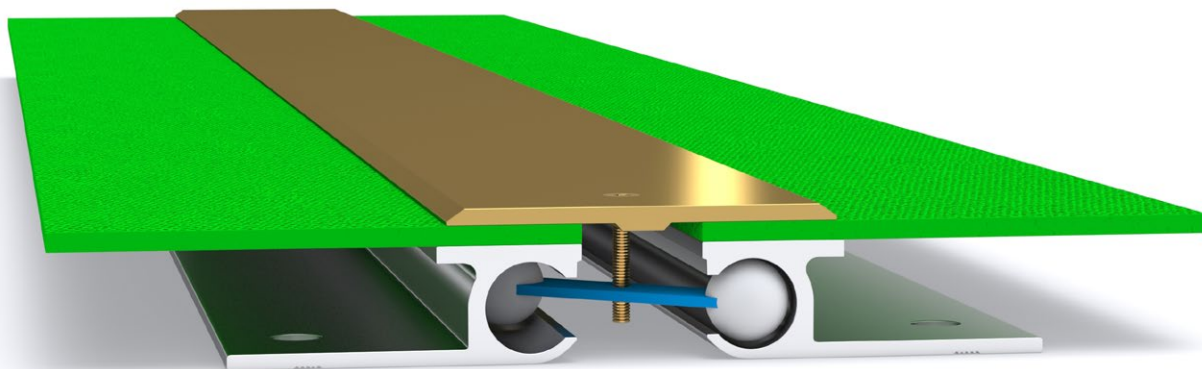

Illustrated: DRCB-25

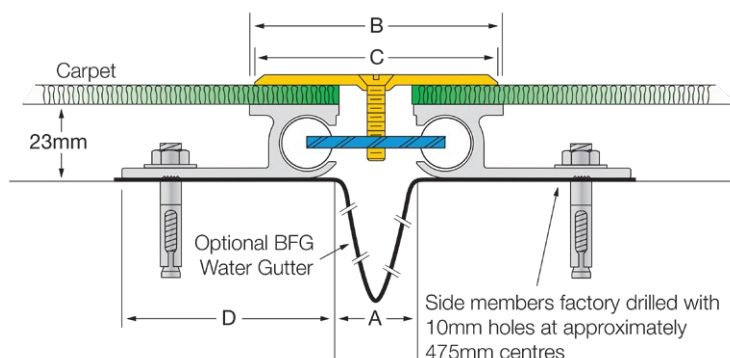

Brass Code smooth deck	A	B	C	D	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
DRCB-25	25	79	75	93	+25/-15mm	40mm	23mm	3mm
DRCB-50	50	104	100	93	+/-25mm	50mm	23mm	3mm
DRCB-75	75	129	125	93	+/-25mm	50mm	23mm	3mm
DRCB-100	100	154	150	93	+/-25mm	50mm	23mm	3mm
DRCB-150	150	194	200	93	+/-25mm	50mm	23mm	4mm



FEATURES

- Aluminium floor expansion joint cover with a brass cover plate.
- Suited to carpet flooring applications.
- These joint covers should be used in conjunction with carpet and underlay, direct stick carpet or carpet tiles.
- 23mm depth below carpet base.
- Installed in a preformed recess.

MATERIALS

- Aluminium 6063-T5 mill finish alloy.
- Brass 380 mill finish alloy cover plate.
- Supplied in 3050mm lengths (brass cover plates supplied in 4000mm lengths).
- Spring steel treated centering bar with nylon spherical


balls (at ~475mm centres).

FIXINGS

- Side member pre-drilled at ~475mm centres for 10mm fasteners.

FURTHER TECHNICAL SPECIFICATIONS

- [Website Link - PDF and DWG Details](#)
- [Product Information](#)
- [Joint Specifications](#)
- [Fire Rated Systems](#)
- [Full Product Catalogue](#)
- [Architectural Specifications](#)
- [Warranty](#)



multi directional
6-way movement



indoor & out-
door use



BFG water
gutter



fire rated (joint
widths >50mm)

w www.latham-australia.com

e sales@latham-australia.com

p +612 9879 7888