



# Latham Carpet-Line Series Aluminium Expansion Joint Cover with Brass Cover Plate DRCBL

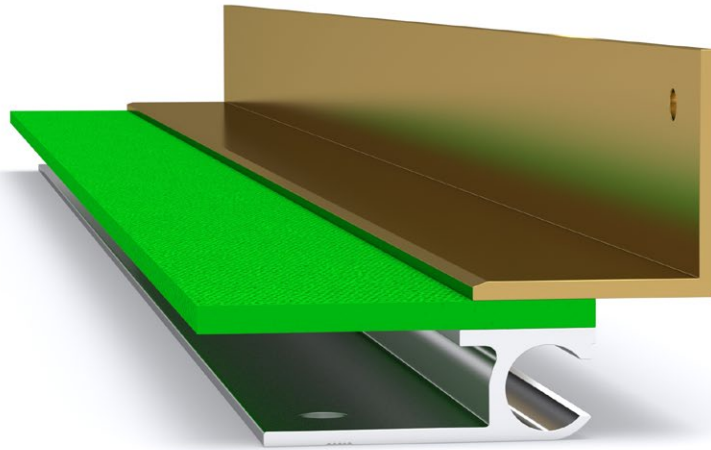

Illustrated: DRCBL-25

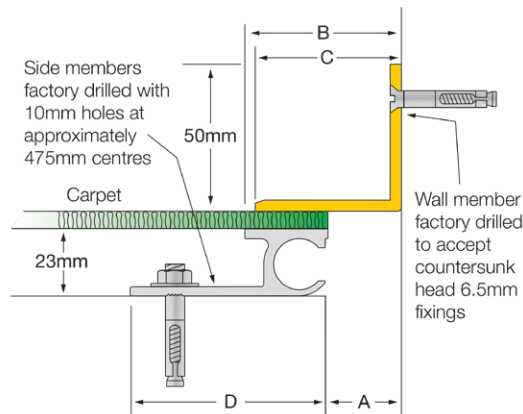

Brass Code smooth deck	A	B	C	D	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
DRCBL-25	25	52	50	93	+/-12mm	25mm	23mm	3mm
DRCBL-50	50	77	75	93	+/-12mm	25mm	23mm	3mm
DRCBL-75	75	102	100	93	+/-12mm	25mm	23mm	3mm
DRCBL-100	100	127	125	93	+/-12mm	25mm	23mm	3mm
DRCBL-150	150	177	175	93	+/-12mm	25mm	23mm	4mm

## FEATURES

- Aluminium floor-to-wall expansion joint cover with a brass cover plate.
- Suited to carpet flooring applications.
- These joint covers should be used in conjunction with carpet and underlay, direct stick carpet or carpet tiles.
- 23mm depth below carpet base.
- Installed in a preformed recess.

## MATERIALS


- Aluminium 6063-T5 mill finish alloy.
- Brass 380 mill finish alloy cover plate.
- Supplied in 3050mm lengths (brass cover plates supplied in 4000mm lengths).

## FIXINGS

- Side member pre-drilled at ~475mm centres for 10mm fasteners.
- Wall member pre-drilled at ~475mm centres to accept countersunk head 6.5mm fixings.

## FURTHER TECHNICAL SPECIFICATIONS

- [Website Link - PDF and DWG Details](#)
- [Product Information](#)
- [Joint Specifications](#)
- [Fire Rated Systems](#)
- [Full Product Catalogue](#)
- [Architectural Specifications](#)
- [Warranty](#)



multi directional  
6-way movement



indoor & out-  
door use



BFG water  
gutter



fire rated (joint  
widths >50mm)