



# Latham Carpet-Line Series Aluminium Expansion Joint Cover with Stainless Steel Cover Plate DRCS

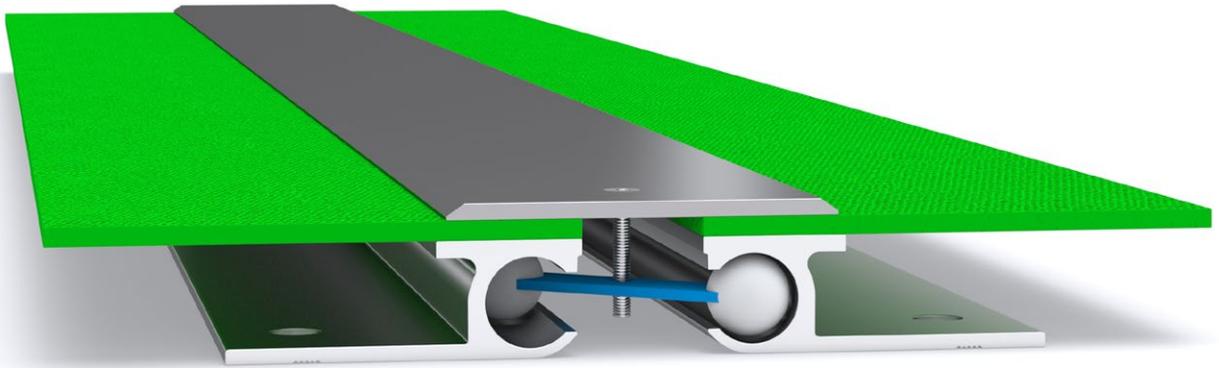

Illustrated: DRCS-25

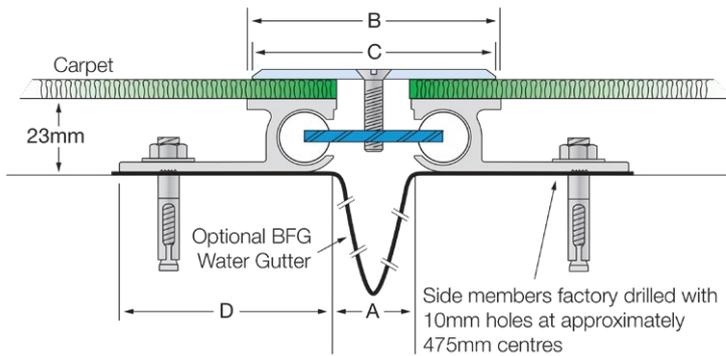

Stainless Steel Code smooth deck	A	B	C	D	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
DRCS-25	25	79	75	68	+25/-15mm	40mm	23mm	3mm
DRCS-50	50	104	100	68	+/-25mm	50mm	23mm	3mm
DRCS-75	75	129	125	68	+/-25mm	50mm	23mm	3mm
DRCS-100	100	154	150	68	+/-25mm	50mm	23mm	3mm
DRCS-150	150	194	200	68	+/-25mm	50mm	23mm	4mm

## FEATURES

- Aluminium floor expansion joint cover with a stainless steel cover plate.
- Suited to carpet flooring applications.
- These joint covers should be used in conjunction with carpet and underlay, direct stick carpet or carpet tiles.
- 23mm depth below carpet base.
- Installed in a preformed recess.

## MATERIALS

- Aluminium 6063-T5 mill finish alloy.
- 304 Grade, 2B finish stainless steel cover plates.
- Supplied in 3050mm lengths.
- Spring steel treated centering bar with nylon spherical balls (at ~475mm centres).

## FIXINGS

- Side member pre-drilled at ~475mm centres for 10mm fasteners.

## FURTHER TECHNICAL SPECIFICATIONS

- [Website Link - PDF and DWG Details](#)
- [Product Information](#)
- [Joint Specifications](#)
- [Fire Rated Systems](#)
- [Full Product Catalogue](#)
- [Architectural Specifications](#)
- [Warranty](#)



multi directional  
6-way movement



indoor & out-  
door use



BFG water  
gutter



fire rated (joint  
widths >50mm)