



Latham Carpet-Line Series Aluminium Expansion Joint Cover  
**SCA**

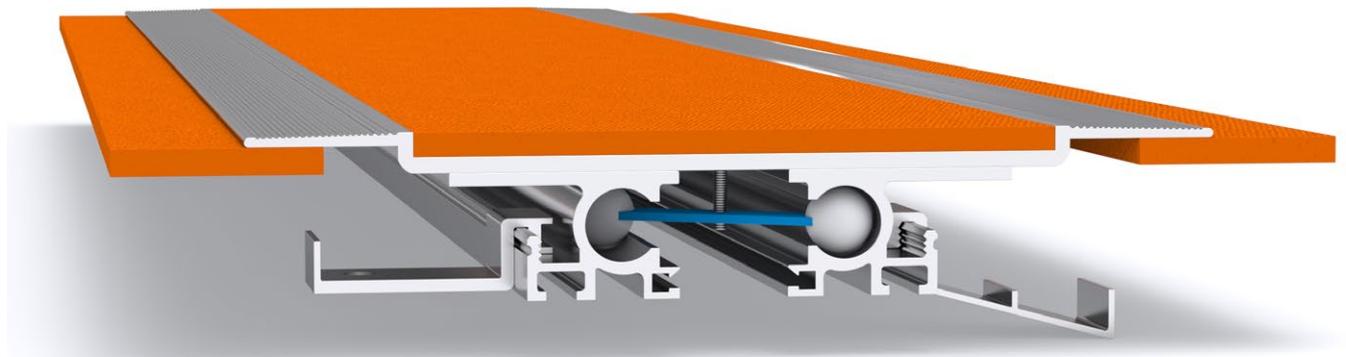

Illustrated: SCA-25

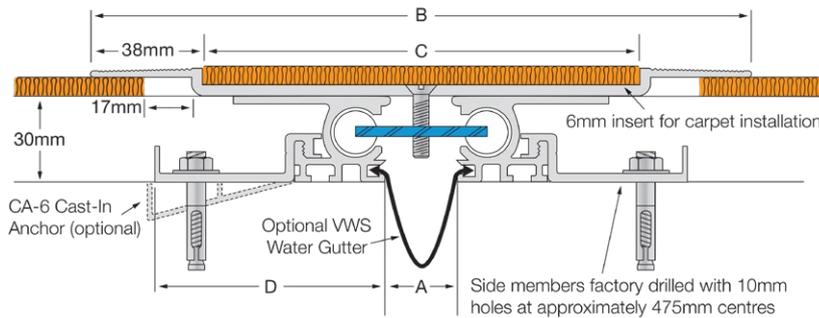

| Aluminium Code ribbed deck | A   | B   | C   | D  | Movement  | Total Available Movement | Overall Depth | Cover Plate Thickness |
|----------------------------|-----|-----|-----|----|-----------|--------------------------|---------------|-----------------------|
| SCA-25                     | 25  | 230 | 154 | 82 | +38/-17mm | 55mm                     | 30mm          | 9mm                   |
| SCA-50                     | 50  | 230 | 154 | 82 | +/-34mm   | 68mm                     | 30mm          | 9mm                   |
| SCA-75                     | 75  | 230 | 154 | 82 | +/-34mm   | 68mm                     | 30mm          | 9mm                   |
| SCA-100                    | 100 | 230 | 154 | 82 | +/-34mm   | 68mm                     | 30mm          | 9mm                   |

**FEATURES**

- Aluminium floor expansion joint cover.
- Suited to carpet flooring applications.
- These joint covers should be used in conjunction with carpet and underlay, direct stick carpet or carpet tiles.
- 30mm depth below carpet base.
- Installed in a preformed recess or cast-in.

**MATERIALS**

- Aluminium 6063-T5 mill finish alloy.
- Supplied in 3050mm lengths.
- Spring steel treated centering bar with nylon spherical balls (at ~475mm centres).

**FIXINGS**

- Supplied with clip-on CA-16 Block-Out Anchors (10mm holes pre-drilled) installed at ~500mm centres.
- On request: CA-6 Cast-In Anchors can be supplied for cast-in installations.

**FURTHER TECHNICAL SPECIFICATIONS**

- [Website Link - PDF and DWG Details](#)
- [Product Information](#)
- [Joint Specifications](#)
- [Fire Rated Systems](#)
- [Full Product Catalogue](#)
- [Architectural Specifications](#)
- [Warranty](#)



multi directional 6-way movement



indoor & outdoor use



VWS water gutter