


Latham Wall-Line Series Aluminium Expansion Joint Cover

L



Illustrated: 25L

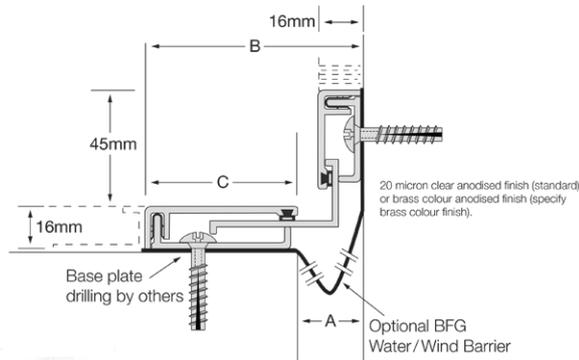

Aluminium Code	A	B	C	Movement	Total Available Movement	Overall Depth
25L	25	83	58	+25/-15mm	40mm	16mm
50L	50	108	58	+/-25mm	50mm	16mm
75L	75	133	58	+/-25mm	50mm	16mm
100L	100	158	58	+/-25mm	50mm	16mm
150L	150	208	58	+/-25mm	50mm	16mm

FEATURES

- Aluminium wall-to-ceiling expansion joint cover.
- Installed flush internally with 16mm wall board or appear almost flush with 13mm board due to the curvature of the joint edge.
- Can also be installed surface mounted.

MATERIALS

- Aluminium 6063-T5 mill finish alloy.
- Supplied in 3050mm lengths.
- All visual surfaces come with a 20 micron clear anodised finish (contact a Latham representative for alternative anodising or powder coating options).

FIXINGS

- Side base sections should be site drilled for fixings at ~450mm centres.
- Suitable fixings should be sourced to suit the substrate.

FURTHER TECHNICAL SPECIFICATIONS

- [Website Link - PDF and DWG Details](#)
- [Product Information](#)
- [Joint Specifications](#)
- [Fire Rated Systems](#)
- [Full Product Catalogue](#)
- [Architectural Specifications](#)
- [Warranty](#)



multi directional 6-way movement



indoor & outdoor use



BFG water gutter



fire rated (joint widths >50mm)